

AG 2100 Marine Wet Exhaust Corrugated




Applications

Marine engine wet exhaust systems where the exhaust gases are mixed with the discharge of cooling water.

Advantages

- Extreme flexibility.
- Low weight.
- Weather and ageing resistant.
- Corrugated and user friendly.
- DNV approved.

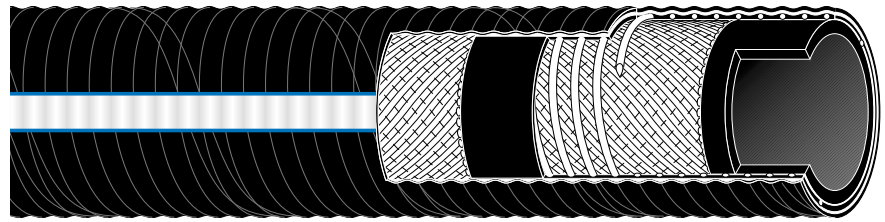


Technical description

Inner tube: CR, black, smooth.

Reinforcement: synthetic textile with steel wire helix embedded in the hose wall.
Cover: CR, black fabric impression, corrugated, with a one lengthwise white stripe surrounded in blue.

Temperature range: -30 °C to +100 °C, can intermittent withstand +580 °C.

Branding: in blue ink on the white stripe:



Complementary information

Certified by DNV in accordance to:

- ISO 13363 type 2.
- SAE J 2006 type R2.
- Nordic Boat Standard MC9.

Couplings / Fittings

Clamps.

ID mm	Wall thickness mm	OD mm	Working pressure bar	Bursting pressure bar	Max. vacuum bar	Bending radius mm	Weight kg/m	Length m	Article No.	Stock item
76.0	5.00 ± 0.6	86.0 ± 1.2	3	9	0.9	200	1.81	40	71151	●
90.0	5.00 ± 0.7	100.0 ± 1.3	2	6	0.9	230	2.16	20	71152	●
102.0	5.00 ± 0.7	112.0 ± 1.3	2	6	0.9	275	2.42	20	71153	●
127.0	5.50 ± 0.7	138.0 ± 1.4	2	6	0.9	425	2.97	20	71154	●
152.0	5.50 ± 0.7	163.0 ± 1.4	2	6	0.9	550	3.52	20	71155	●
205.0	6.50 ± 1.0	217.0 ± 2.0	1.5	5	0.8	720	6.00	20	5014028	●

● = Stock item

H3 3 20 01 1 /21 11 2001