




Applications

A sturdy water discharge hose for use in all sectors of industry such as building and public works, paper mills, quarries, etc.

Advantages

- Excellent resistance to kinking.
- Very easy to handle.
- Wide range of diameters.

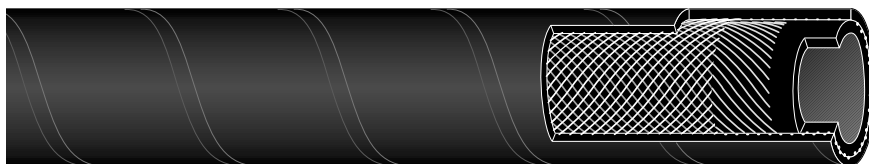

Technical description

Inner tube: NR/SBR, black, smooth.
Reinforcement: synthetic textile.
Cover: SBR, black, fabric impression.
Temperature range: - 30 °C to +60 °C.
Branding: unbranded.

ID mm	Wall thickness mm	OD mm	Working pressure bar	Bursting pressure bar	Bending radius mm	Weight kg/m	Length m	Article No.	Stock item
30.0 ± 0.50	5.00	40.0 ± 1.00	10	28	240	0.80	20	200350	•
							40	200351	•
32.0 ± 0.50	5.00	42.0 ± 1.00	10	28	260	0.84	20	200352	•
							40	200353	•
35.0 ± 0.50	5.00	45.0 ± 1.00	10	28	280	0.91	20	200354	•
							40	200355	•
38.0 ± 0.50	5.00	48.0 ± 1.00	10	28	310	0.98	20	200356	•
							40	200357	•
40.0 ± 0.50	5.00	50.0 ± 1.00	10	28	320	1.03	20	200358	•
							40	200359	•
45.0 ± 0.50	5.00	55.0 ± 1.00	10	28	360	1.14	20	70766	1
							40	70767	1
50.0 ± 0.50	5.50	61.0 ± 1.00	10	28	500	1.41	20	200364	•
							40	200365	•
55.0 ± 0.50	5.50	66.0 ± 1.00	10	28	550	1.53	20	70768	2
							40	70769	2
60.0 ± 0.50	5.75	71.5 ± 1.00	10	28	600	1.68	20	70770	2
							40	70771	2
63.0 ± 0.50	5.75	74.5 ± 1.00	10	28	630	1.75	20	70772	2
							40	70773	2
70.0 ± 0.50	5.75	81.5 ± 1.00	10	28	700	1.93	20	127705	2
							40	70420	2
75.0 ± 0.75	5.75	86.5 ± 1.50	10	28	750	2.05	20	70421	2
							40	70422	2
80.0 ± 0.75	6.25	92.5 ± 1.50	10	28	850	2.44	20	70423	2
							40	70424	2
89.0 ± 0.75	6.25	101.5 ± 1.50	10	28	900	2.72	20	70774	2
							40	70426	2
100.0 ± 1.00	6.25	112.5 ± 1.50	10	28	1000	3.01	20	70427	2
							40	70428	2

• = Stock item.
 1 = Non stock, min. quantity = 400 m.
 2 = Non stock, min. quantity = 200 m.