




## Applications

Pumping installations, suction and delivery.  
Sewer and tank truck applications.

## Advantages

- Excellent kink resistance even at small bending radius.
- Withstands 0.8 bar vacuum.
- Smooth cover to prevent friction on sharp edges of manholes, walls fences etc.
- This hose can be produced with straight or enlarged ends (from 3 to 12 mm) to fit all types of couplings.
- High resistance to abrasive environment.

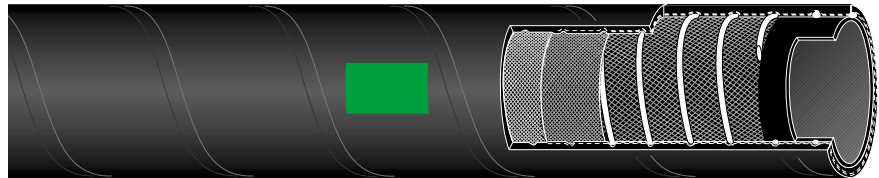

## Technical description

**Inner tube:** NR, black, smooth.  
**Reinforcement:** synthetic textile, cords.  
**Helix:** steel.  
**Cover:** NR, black, fabric impression.  
**Temperature range:** -30 °C to +60 °C..  
**Branding:** green vulcanised rubber label, marked in black

ASSAINIX  TRELLEBORG

## Complementary information

Other lengths manufactured on request.

ID mm	Wall thickness mm	OD mm	Working pressure bar	Bursting pressure bar	Max vacuum bar	Bending radius mm	Weight kg/m	Length m	Article No.	Stock item
90.0	10.0 ± 2.5	110.0 ± 2	4	12	0.8	540	4.75	10.0	123147	1
100.0	10.0 ± 2.5	120.0 ± 2	4	12	0.8	800	5.21	* 3.0	60276	1
100.0	10.0 ± 2.5	120.0 ± 2	4	12	0.8	800	5.21	** 3.0	60277	1
100.0	10.0 ± 2.5	120.0 ± 2	4	12	0.8	800	5.21	** 4.5	60278	●
110.0	10.0 ± 2.5	130.0 ± 2	4	12	0.8	880	6.65	10.0	122913	1
120.0	10.0 ± 2.5	140.0 ± 2	4	12	0.8	960	7.19	10.0	70779	1
150.0	10.0 ± 2.5	170.0 ± 2	4	12	0.8	1200	8.80	10.0	70780	1

● = Stock item.  
 1= Non stock, min. quantity = 20 m. Max. length = 10 m.  
 \* = Straight cuffs.  
 \*\* = Enlarged cuffs.