




Applications

For use in sewer cleaning water pressure applications. Suitable for replacing hydraulic hoses used in this application.

Advantages

- Abrasion and weather resistant cover compound.
- Smooth cover, low friction.
- Long lengths.

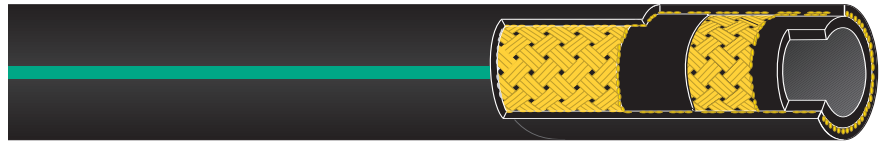

Technical description

Inner tube: SBR, black, smooth.

Reinforcement: steel, braided.

Cover: SBR, black, smooth.

Temperature range: -30 °C to +80 °C.

Branding: with a discontinuous succession of green embossed broken line and between each sequence of broken line, embossed alternately in green :

KLERIX and **WP 200 bar** and **quart. / year**

Complementary information

Delivered without couplings.

Couplings / Fittings

Hydraulic coupling.

ID mm	Wall thickness mm	OD mm	Working pressure bar	Bursting pressure bar	Bending radius mm	Weight kg/m	Length m	Article No.	Stock item		
13.0	± 0.8	5.00	23.0	± 0.8	200	500	70	0.45	40	71107	●
									50	5500018	●
									60	71108	●
									80	71109	●
									100	71110	●
19.0	± 0.8	6.25	31.5	± 0.8	200	500	95	0.82	40	5010435	1
									60	71113	1
									80	71114	●
									100	71115	●
									120	71116	●
25.0	± 1.0	6.55	38.1	± 1.0	200	500	110	1.14	60	71117	2
									80	71118	●
									100	71119	●
									120	71120	●
									32.0	± 1.2	6.95
80	71122	3									
100	71123	3									
120	71124	3									

● = Stock item.

1 = Non stock, mini. quantity = 2500 m .

2 = Non stock, mini. quantity = 2000 m .

3 = Non stock, mini. quantity = 1000 m .