




Applications

For suction and discharge of domestic water, industrial water, effluents, slurry and liquid manure.

Advantages

- Wide range of diameters to suit pumps in all fields of industry.
- Excellent flexibility.
- Constant working pressure of 10 bar throughout range.

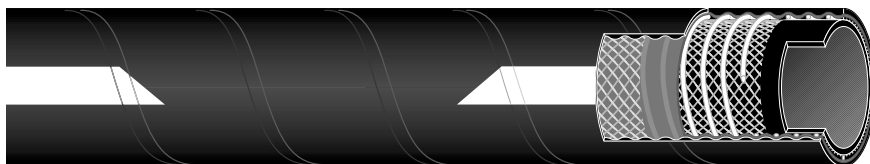

Technical description

Inner tube: SBR, black smooth.
Reinforcement: synthetic textile.
Helix: steel, embedded in the hose wall.
Cover: SBR, black, fabric impression.
Temperature range: -30 °C to +60 °C.
Branding: by transfer stripe showing a discontinuous of white trapeziums with:



TRELLEBORG

printed in black on each trapezium

OST

printed in white between trapeziums.

ID mm	Wall thickness mm	OD mm	Working pressure bar	Bursting pressure bar	Max. vacuum bar	Bending radius mm	Weight kg/m	Length m	Article No.	Stock item
25.0	4.75 ± 0,75	35.0 ± 1.00	10	30	0.9	75	0.77	20	70440	•
								40	70775	•
28.0	4.75 ± 0,75	38.0 ± 1.00	10	30	0.9	85	0.83	20	70442	1
								40	70443	1
30.0	4.75 ± 0,75	40.0 ± 1.00	10	30	0.9	90	0.86	20	70444	•
								40	96803	•
32.0	4.75 ± 0,75	42.0 ± 1.00	10	30	0.9	95	0.91	20	70445	1
								40	95025	1
35.0	4.75 ± 0,75	45.0 ± 1.00	10	30	0.9	105	0.96	20	70446	1
								40	96804	•
38.0	4.75 ± 0,75	48.0 ± 1.00	10	30	0.9	115	1.04	20	70447	1
								40	70448	1
40.0	4.75 ± 0,75	50.0 ± 1.00	10	30	0.9	160	1.06	20	70449	•
								40	96805	•
43.0	4.75 ± 0,75	53.0 ± 1.00	10	30	0.9	170	1.15	20	70450	1
								40	70451	1
45.0	4.75 ± 0,75	55.0 ± 1.00	10	30	0.9	180	1.18	20	70452	•
								40	96806	•
50.0	5.25 ± 1.00	61.0 ± 1.50	10	30	0.9	200	1.61	20	95032	•
								40	96807	•
53.0	5.25 ± 1.00	64.0 ± 1.50	10	30	0.9	210	1.68	20	70453	1
								40	70454	1
55.0	5.25 ± 1.00	66.0 ± 1.50	10	30	0.9	220	1.74	20	70455	1
								40	70456	1
60.0	5.25 ± 1.00	71.0 ± 1.50	10	30	0.9	240	1.84	20	70457	•
								40	96808	•
63.0	5.75 ± 1.00	75.0 ± 1.50	10	30	0.9	250	1.91	20	70776	2
								40	70459	2
65.0	5.75 ± 1.00	77.0 ± 1.50	10	30	0.9	290	1.97	20	70460	2
								40	70461	2
68.0	5.75 ± 1.00	80.0 ± 1.50	10	30	0.9	305	2.22	20	70462	2
								40	70463	2
70.0	5.75 ± 1.00	82.0 ± 1.50	10	30	0.9	315	2.30	20	96809	•
								40	70464	•
75.0	5.75 ± 1.00	87.0 ± 1.50	10	30	0.9	335	2.44	20	96810	•
								40	70465	•
80.0	6.25 ± 1.00	93.0 ± 1.50	10	30	0.9	400	2.78	20	96811	•
								40	70777	•
89.0	6.25 ± 1.00	102.0 ± 1.50	10	30	0.9	445	3.06	20	96812	•
								40	70467	2
100.0	6.50 ± 1.00	113.5 ± 1.50	10	30	0.9	500	3.44	20	96813	•
								40	70468	•
127.0	7.00 ± 1.00	141.0 ± 2.00	10	30	0.9	650	5.46	20	5500523	•
								40	928747	•
152.0	7.00 ± 1.00	166.0 ± 2.00	10	30	0.9	800	6.55	20	5500524	•
								40	928754	•

H1 3 27 53 B / 26 05 2004

1 = Non stock, min. quantity = 400 m.
 2 = Non stock, min. quantity = 200 m.

• = Stock item.