


Applications

Pneumatic transport of bulk abrasive products.
Discharge from road and rail tankers and delivery to storage bins (cement, sand, limestone, coal, etc.).

Advantages

- Lightweight, flexible hose that coils flat and can be supplied cut to length as required.
- Excellent resistance to abrasion.
- Static conductive tube.

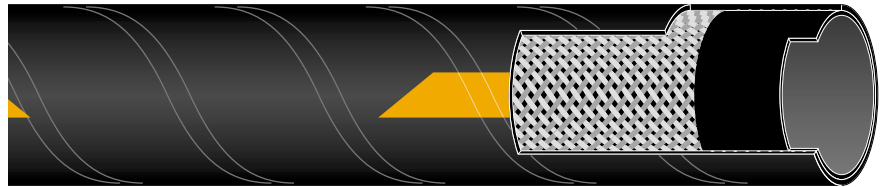

Technical description

Inner tube: wear resistant NR, black, smooth.

Reinforcement: synthetic textile.

Cover: weather resistant NR, black, fabric impression.

Temperature range: -30 °C to +90 °C.

Electrical properties: conductive tube $R < 10^6 \Omega/m$.

Branding: by transfer stripe showing a discontinuous of orange trapeziums with



TRELLEBORG

printed in black on each trapezium

and

SUPERVRAC

printed in orange between trapeziums

Couplings / Fittings

Factory fitted assemblies available with full flow couplings in 89 mm and 110 mm.
For other assemblies consult TRELLEBORG.

ID mm	Wall thickness mm	OD mm	Working pressure bar	Bursting pressure bar	Bending radius mm	Weight kg/m	Length m	Article No.	Stock item
75.0	6.75 ± 1.25	88.5 ± 2	7	21	-	1.83	20	60675	●
							40	60674	●
75.0	9.00 ± 1	93.0 ± 1.5	7	21	-	2.75	20	60189	●
							40	60193	●
85.0	6.00 ± 1	97.0 ± 1.5	7	21	-	2.03	20	129699	1
							40	129700	1
89.0	6.25 ± 1.25	101.5 ± 2	7	21	-	2.07	20	60682	●
							40	60683	●
100.0	6.00 ± 1	112.0 ± 1.5	7	21	-	2.40	20	129701	●
							40	129702	●
100.0	9.00 ± 1	118.0 ± 1.5	7	21	-	3.58	20	60194	●
							40	60195	●
110.0	6.50 ± 1.25	123.0 ± 2	7	21	-	2.71	20	60684	●
127.0	8.50 ± 1.25	144.0 ± 2	7	21	-	4.20	20	60685	1
							40	60686	1
152.0	8.50 ± 1.25	169.0 ± 2	7	21	-	5.00	20	60689	1
							40	60690	1

● = Stock item.

1 = Non stock, mini. quantity = 200 m.