


Applications

Pneumatic transport of bulk abrasive products for the food industry. Discharge from road and rail tankers, and delivery to storage bins: foodstuffs (sugar, flour, milk powder, cattle feed, etc.) and chemicals (fertilizers, granulates, PVC, dye stuffs etc.).

Advantages

- Lightweight, flexible hose that coils flat and can be supplied cut to lengths as required.
- Excellent resistance to abrasion.
- Electrical conductivity ensured by a bonding braid.

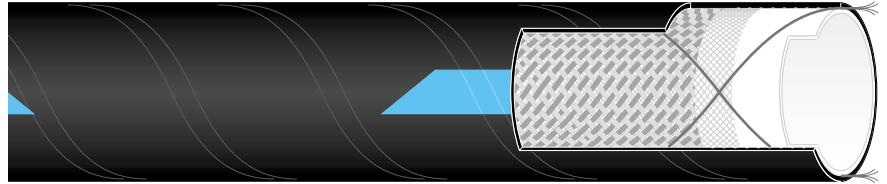

Technical description

Inner tube: foodstuffs, abrasive resistant NR, white, smooth.

Reinforcement: synthetic textile.

Cover: weather resistant NR, black, fabric impression.

Temperature range: -30 °C to +80 °C.

Electrical properties: conductive built in wire.

Branding: by transfer stripe showing a discontinuous of blue trapeziums with:

 TRELLEBORG printed in black on each trapezium

and **SUPERVRAC AL** printed in blue between trapeziums.

Standard / approval: Institut d'Analyses et d'Essais de Centre Ouest de Poitiers (France).

Couplings / Fittings

Factory fitted assemblies available with full flow couplings in 89 mm and 110 mm bore hoses.

For other assemblies consult TRELLEBORG.

ID mm	Wall thickness mm	OD mm	Working pressure bar	Bursting pressure bar	Bending radius mm	Weight kg/m	Length m	Article No.	Stock item
75.0	6.00 ± 1	87.0 ± 1.5	7	21	-	1.80	20	70657	1
							40	70658	1
75.0	9.00 ± 1.25	93.0 ± 1.5	7	21	-	2.78	20	60916	●
							40	60913	●
85.0	6.00 ± 1	97.0 ± 1.5	7	21	-	1.99	20	70659	1
							40	70660	1
89.0	6.00 ± 1	101.0 ± 1.5	7	21	-	2.07	20	60620	●
							40	60621	●
100.0	6.00 ± 1	112.0 ± 1.5	7	21	-	2.35	20	126668	1
							40	70317	1
100.0	9.00 ± 1.25	118.0 ± 1.5	7	21	-	3.60	20	60914	●
							40	60915	●
110.0	6.50 ± 1	123.0 ± 1.5	7	21	-	2.63	20	60623	●
							40	60624	●

● = Stock item.

1 = Non stock, mini. quantity = 200 m.