




## Applications

Pneumatic transport of bulk abrasive products.  
Discharge from road and rail tankers, and delivery to storage bins: cement, sand, lime, coal and also cereals, fertilizers, cattle feed and chemicals (PVC, dye stuffs, granulates, etc.).

## Advantages

- Light weight, flexible hose that coils flat and can be supplied cut to length as required.
- Excellent resistance to abrasion.
- Electrical conductivity ensured by a bonding braid.

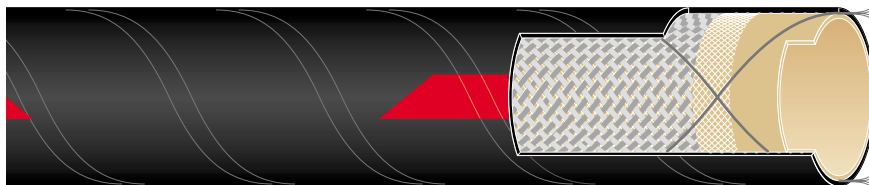

## Technical description

**Inner tube:** heavy duty wear resistant NR, tan, smooth.

**Reinforcement:** synthetic textile.

**Cover:** weather resistant NR, black, fabric impression.

**Temperature range:** -30 °C to +70 °C.

**Electrical properties:** conductive built in wire.

**Branding:** by transfer stripe showing a discontinuous of red trapeziums with:



TRELLEBORG

printed in black on each trapezium

and

**SUPERVRAC TAN**

printed in red between trapeziums.

## Couplings / Fittings

Factory fitted assemblies available with full flow couplings in 89 mm and 110 mm.  
For other assemblies consult TRELLEBORG.

ID mm	Wall thickness mm	OD mm	Working pressure bar	Bursting pressure bar	Bending radius mm	Weight kg/m	Length m	Article No.	Stock item
75.0	6.0 ± 1.25	87.0 ± 1.5	7	21	-	1.72	20	70661	1
							40	125111	1
85.0	6.0 ± 1.25	97.0 ± 1.5	7	21	-	1.81	20	70662	1
							40	70663	1
89.0	6.0 ± 1.25	101.0 ± 1.5	7	21	-	1.98	20	60614	●
							40	60615	●
100.0	6.0 ± 1.25	112.0 ± 1.2	7	21	-	2.24	20	70664	1
							40	70665	1
110.0	6.5 ± 1.25	123.0 ± 1.5	7	21	-	2.50	20	60617	●
							40	60618	●

● = Stock item.

1 = Non stock, mini. quantity = 200 m.