

TRELLVAC Extractor LD




Applications

Universal ducting hose for dust, wood chips, small particles and various types of gas.

Advantages

- Light and flexible design with steel helix, especially useful when low weight and easy handling are valued.

Resistance ●●
 Flexibility ●●●●●●
 Weight ●●●●●●

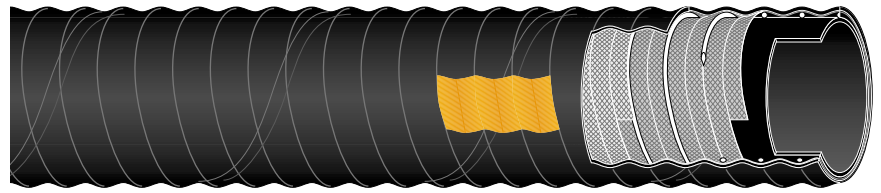

Technical description

Inner tube: wear resistant SBR, black, smooth.
Reinforcement: synthetic textile, woven fabric.
Helix: embedded steel.
Cover: wear and weather resistant SBR, black, corrugated.
Temperature range: -40 °C to +90 °C.
Electrical properties: conductive tube $R < 10^6 \Omega/m$.
Branding: orange label with black text:



and **TRELLVAC Extractor LD**

ID mm	OD * mm	Max. vacuum bar	Bending radius mm	Weight kg/m	Length m	Article No.	Stock item
38.0 +1.5 / -1.5	44.5 ± 0.8	0.90	45	0.44	12	25890	●
51.0 +1.5 / -1.5	57.5 ± 0.8	0.90	70	0.58	12	25908	●
63.0 +1.5 / -1.5	70.0 ± 0.8	0.90	95	0.74	12	25916	●
76.0 +1.5 / -1.5	83.0 ± 0.8	0.90	115	0.88	12	25932	●
90.0 +1.5 / -1.5	97.5 ± 0.8	0.90	125	1.04	12	25965	●
102.0 +1.5 / -1.5	110.0 ± 0.8	0.90	145	1.37	12	25973	●
113.0 +1.5 / -1.5	121.0 ± 0.8	0.90	155	1.50	12	25981	●
127.0 +1.5 / -1.5	135.0 ± 0.8	0.70	170	1.68	12	26005	●
152.0 +1.5 / -1.5	160.0 ± 0.8	0.40	195	2.00	12	26013	●
178.0 +1.5 / -1.5	186.0 ± 0.8	0.25	220	2.33	12	26021	1
204.0 +1.5 / -1.5	212.0 ± 0.8	0.15	245	2.67	12	26039	●

Excellent ●●●●●●
 Very good ●●●●
 Good ●●

● = Stock item.
 1 = Non stock, mini. quantity = 36 m.
 * = OD measured on top of corrugation

H3 3 51 09 1 /04 02 2002