

TRELLVAC Transporter XD



Applications


Transport hose for stationary systems in straight or bend positions in all types of industries.

Extraction and transport of abrasive materials such as sand, gravel, stone, sludge and powder.

Advantages

- Fully rot resistant reinforcement.
- Smooth cover.
- Flexible and very high abrasion resistance.
- Can be used for vacuum and discharge

Resistance ★★★★★
 Flexibility ★★★★★
 Weight ★★★★★

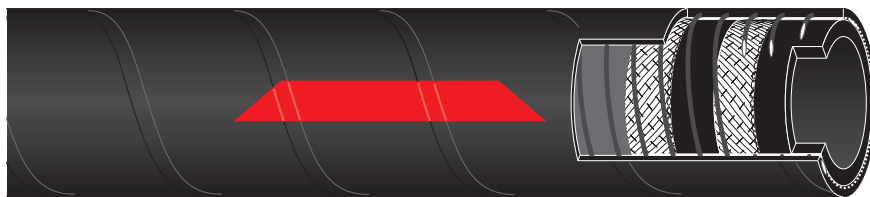

Technical description

Inner tube: wear resistant SBR, black, smooth.

Reinforcement: synthetic textile cords.

Helix: embedded steel.

Cover: wear and weather resistant SBR/NR, black, fabric impression.

Temperature range: -40 °C to +90 °C.

Electrical properties: conductive tube $R < 10^6 \Omega/m$.

Branding: by transfer stripe showing a discontinuous of red trapeziums with :



TRELLEBORG

printed in black on each trapezium

and

TRELLVAC Transporter XD

printed in red between trapeziums

ID mm	OD mm	Working pressure bar	Bursting pressure bar	Max. vacuum bar	Bending radius mm	Weight kg/m	Length	Article No.	Stock item
50.0 ± 1.5	72.0 ± 1.5	10	30	0.9	150	3.0	40	-	1
76.0 ± 1.5	99.5 ± 2.5	10	30	0.9	200	4.4	40	-	1
102.0 ± 1.5	125.0 ± 2.5	10	30	0.9	280	5.9	40	-	1
127.0 ± 1.5	154.0 ± 2.5	10	30	0.9	400	8.5	40	-	1
152.0 ± 1.5	178.0 ± 2.5	10	30	0.9	600	9.3	40	-	1
204.0 ± 1.5	238.0 ± 3.5	10	30	0.9	1300	16.5	10	-	1
254.0 ± 1.5	291.0 ± 5.0	5	15	0.9	1600	21.3	10	-	1
305.0 ± 1.5	342.0 ± 5.0	5	15	0.9	1950	31.0	10	-	1

Excellent ★★★★★
 Very good ★★★★★
 Good ★★★★★

1 = Non stock, min. quantity = 40 m.

H3 3 51 37 A /26 02 2004