




## Applications

For suction of light industrial debris and dust. Suitable for conveying small particles and moderately abrasive materials.

## Advantages

- Very light weight and easy to handle.
- Excellent bending radius and flexibility.
- Can be supplied cut to required length.
- Very good crush resistance.

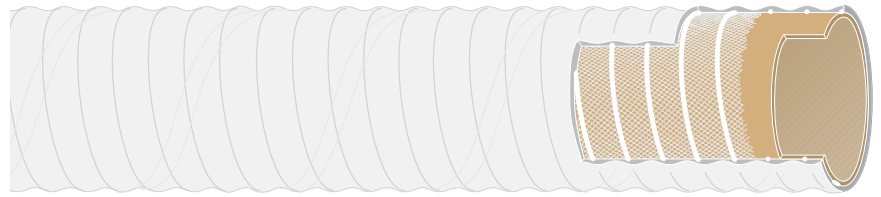

## Technical description

**Inner tube:** wear resistant NR, beige, smooth.

**Reinforcement:** synthetic textile, cords.

**Helix:** embedded steel.

**Cover:** rubber coated fabric, white, corrugated.

**Temperature range:** –30 °C to +70 °C.

**Branding:** unbranded.

ID mm	Wall thickness mm	OD mm	Max. vacuum bar	Bending radius mm	Weight kg/m	Length m	Article No.	Stock item		
30.0	+1.5 / -1.5	4.5	+1.5 / -1.5	39.0	0.8	150	0.50	10	126702	1
35.0	+1.5 / -1.5	4.5	+1.5 / -1.5	44.0	0.8	175	0.57	10	123919	1
40.0	+1.5 / -1.5	4.5	+1.5 / -1.5	49.0	0.8	200	0.63	10	74118	1
50.0	+1.5 / -1.5	4.5	+1.5 / -1.5	59.0	0.8	250	0.76	10	201844	•
60.0	+1.5 / -1.5	4.5	+1.5 / -1.5	69.0	0.8	300	0.88	10	201845	•
70.0	+1.5 / -1.5	4.5	+1.5 / -1.5	79.0	0.8	350	1.02	10	74130	1
80.0	+1.5 / -1.5	5.5	+1.5 / -1.5	91.0	0.8	400	1.42	10	201846	•
100.0	+1.5 / -1.5	5.5	+1.5 / -1.5	111.0	0.8	500	1.75	10	201847	•
105.0	+1.5 / -1.5	5.5	+1.5 / -1.5	116.0	0.8	525	1.84	10	70668	1
115.0	+1.5 / -1.5	5.5	+1.5 / -1.5	126.0	0.8	575	2.00	10	70553	1
125.0	+1.5 / -1.5	5.5	+1.5 / -1.5	136.0	0.8	625	2.17	10	95689	2
150.0	+1.5 / -1.5	7.0	+1.5 / -1.5	164.0	0.8	750	3.67	10	202128	•

• = Stock item.

1 = Non stock. Min. quantity = 20 m.

2 = Non stock. Min. quantity = 40 m.