




## Applications

Air hose also suitable for discharge of water and liquid foodstuffs.

## Advantages

- Light, flexible, multi-purpose hose (see separate chemical resistance table).
- Comprehensive range of diameters.

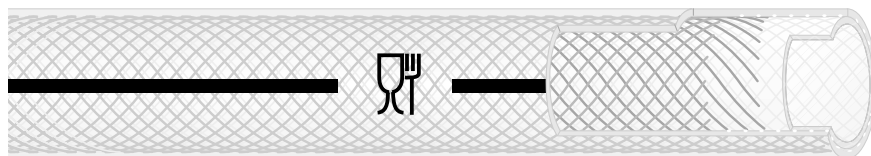

## Technical description

**Inner tube:** PVC, transparent, smooth.

**Reinforcement:** synthetic textile, yarns.

**Cover:** PVC, transparent, smooth.

**Temperature range:** -15 °C to +60 °C.

**Branding:** food quality symbol.

**Standard / approval:** French food discharge standard (IANESCO of Poitiers).

## Complementary information

Working pressure and bursting pressure mentioned are valid at +20 °C.

ID mm	Wall thickness mm	OD mm	Working pressure bar	Bursting pressure bar	Bending radius mm	Weight kg/m	Length m	Article No.	Stock item
4.0 ± 0.5	3.00	10.0 ± 0.25	15	45	45	0.08	* 4 x 50	85010	1
5.0 ± 0.5	3.00	11.0 ± 0.25	15	45	50	0.09	4 x 50	70648	1
6.0 ± 0.5	3.00	12.0 ± 0.25	15	45	55	0.10	* 8 x 25 * 4 x 50	202564 202565	●
8.0 ± 0.6	3.00	14.0 ± 0.25	15	45	65	0.13	* 6 x 25 * 3 x 50	202566 202567	●
9.0 ± 0.6	3.00	15.0 ± 0.25	15	45	70	0.14	* 6 x 25 * 3 x 50	202568 202569	●
10.0 ± 0.6	3.00	16.0 ± 0.25	15	45	75	0.15	* 6 x 25 * 3 x 50	202570 202571	●
12.0 ± 0.6	3.00	18.0 ± 0.25	15	45	80	0.17	* 4 x 25 * 2 x 50	202572 202573	●
13.0 ± 0.6	3.50	20.0 ± 0.25	10	30	90	0.22	25 50	202574 202575	●
16.0 ± 0.8	3.25	22.5 ± 0.25	10	30	100	0.24	25 50	202576 202577	●
19.0 ± 0.8	4.00	27.0 ± 0.4	8	24	125	0.35	25 50	202542 202543	●
25.0 ± 1	4.50	34.0 ± 0.4	6	18	155	0.51	25 50	202544 202545	●
32.0 ± 1	5.00	42.0 ± 0.5	6	18	190	0.72	25 50	202546 202547	●
38.0 ± 1	5.00	48.0 ± 0.5	6	18	215	0.83	25	202548	●
50.0 ± 1	7.00	64.0 ± 0.5	6	18	300	1.55	25	202549	●

● = Stock item.

1 = Non stock, mini. quantity = 2000 m.

\* = Number of coils in each cartoon according to table above.  
Up to ID 12 mm hoses are delivered in carton boxes.