




Applications

Suction and discharge of water, food products, spray solutions, sand, waste water, and chemical products (see chemical resistance table for PVC).

Advantages

- Smooth bore.
- Can be supplied cut to length as required.
- Wide range of diameters.
- Food grade complying with French Standards.

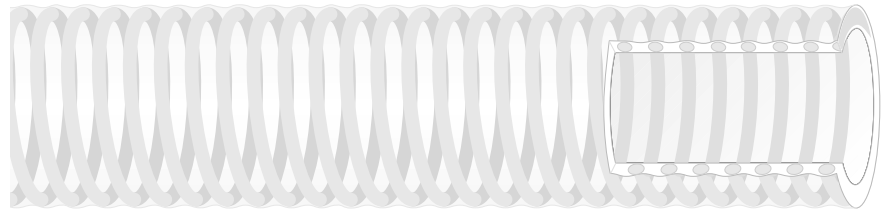

Technical description

Inner tube: PVC, transparent, smooth.
Helix: PVC, grey.
Cover: PVC, transparent, corrugated.
Temperature range: -10 °C to +60 °C.
Branding: unbranded.
Standard / approval: the French standards for foodstuff discharge.

Complementary information

All technical data is valid at +20 °C.

ID mm	Wall thickness mm	OD mm	Working pressure bar	Bursting pressure bar	Max. vacuum bar	Bending radius mm	Weight kg/m	Length m	Article No.	Stock item
20.0 ± ± 1.0	3.0 - 0 / + 0.3	26.0	10	25	0.8	110	0.25	25	200956	•
								50	200957	•
25.0 ± 1.0	3.0 - 0 / + 0.3	31.0	10	25	0.8	125	0.35	25	200960	•
								50	200961	•
30.0 ± 1.0	3.0 - 0 / + 0.3	36.0	8	20	0.8	135	0.40	25	200962	•
								50	200963	•
35.0 ± 1.0	3.0 - 0 / + 0.3	41.0	8	20	0.8	140	0.50	25	200964	•
								50	200965	•
40.0 ± 1.0	2.5 - 0 / + 0.3	45.0	7	18	0.8	160	0.54	25	200966	•
								50	200967	•
45.0 ± 1.0	3.5 - 0 / + 0.3	52.0	7	18	0.8	158	0.64	25	200968	•
								50	200969	•
50.0 ± 1.0	3.5 - 0 / + 0.3	57.0	7	18	0.8	175	0.76	25	200970	•
								50	200971	•
55.0 ± 1.0	3.5 - 0 / + 0.3	62.0	7	18	0.8	165	0.86	25	200972	•
								50	200973	1
60.0 ± 1.0	3.5 - 0 / + 0.3	67.0	7	18	0.8	180	0.90	25	200974	•
								50	200975	•
70.0 ± 1.0	3.5 - 0 / + 0.3	77.0	6	15	0.8	210	1.13	25	200976	•
75.0 ± 1.0	4.0 - 0 / + 0.3	83.0	6	15	0.8	188	1.27	25	200977	•
80.0 ± 1.5	4.5 - 0 / + 0.3	89.0	6	15	0.8	240	1.45	25	200978	•
90.0 ± 1.5	5.5 - 0 / + 0.3	101.0	5	13	0.8	270	1.85	25	200979	•
100.0 ± 1.5	6.0 - 0 / + 0.3	112.0	4	10	0.8	300	2.00	25	200980	•
110.0 ± 1.5	6.0 - 0 / + 0.3	122.0	4	10	0.8	330	2.50	25	200981	•
120.0 ± 1.5	6.0 - 0 / + 0.3	132.0	3	8	0.8	420	2.80	25	200982	•

• = Stock item.
 1 = Non stock, min. quantity = 200 m.