




Applications

Suction and discharge of water, food products, spray solutions, sand, waste water, and chemical products (see chemical resistance table for PVC).

Advantages

- Smooth bore.
- Can be supplied cut to length as required.
- Food grade complying with French standards.

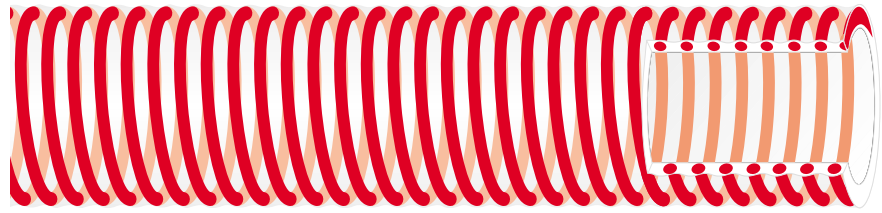

Technical description

Inner tube: PVC, transparent, smooth.

Helix: PVC, red.

Cover: PVC, transparent, corrugated.

Temperature range: -10 °C to +60 °C.

Branding: unbranded.

Standard / approval: the French standards for foodstuff discharge.

Complementary information

All technical data is valid at +20 °C.

ID mm	Wall thickness mm	OD mm	Working pressure bar	Bursting pressure bar	Max. vacuum bar	Bending radius mm	Weight kg/m	Length m	Article No.	Stock item
35.0 ± 1.0	4.0 -0 / + 0.3	43.0	9.0	23	0.8	140	0.66	25	127200	1
40.0 ± 1.0	4.0 -0 / + 0.3	48.0	9.0	23	0.8	160	0.79	25	200088	•
50.0 ± 1.0	5.0 -0 / + 0.3	60.0	7.5	19	0.8	175	1.06	25	200089	•
60.0 ± 1.0	5.0 -0 / + 0.3	70.0	7.5	19	0.8	210	1.36	25	200090	1
70.0 ± 1.0	5.0 -0 / + 0.3	80.0	6.5	16	0.8	210	1.60	25	200091	•
80.0 ± 1.5	6.0 -0 / + 0.3	92.0	6.5	16	0.8	240	1.87	25	200092	1
90.0 ± 1.5	6.5 -0 / + 0.3	103.0	5.0	13	0.8	315	2.20	25	200093	1
100.0 ± 1.5	6.5 -0 / + 0.3	113.0	4.5	12	0.8	350	2.80	25	200094	1
120.0 ± 1.5	7.5 -0 / + 0.3	135.0	4.0	10	0.8	480	3.40	25	200095	1

• = Stock item.
1 = Non stock, min. quantity = 200 m.