




Applications

Discharge of hot water for all types of industrial and agricultural applications in harsh conditions.

Advantages

- Extremely resistant to ageing and atmospheric conditions.
- Wide range of operating temperatures: -30 °C to +100 °C.
- Wide range of diameters.
- Resistant to many fluids.
- Attractive, well-finished appearance.
- Long service life.

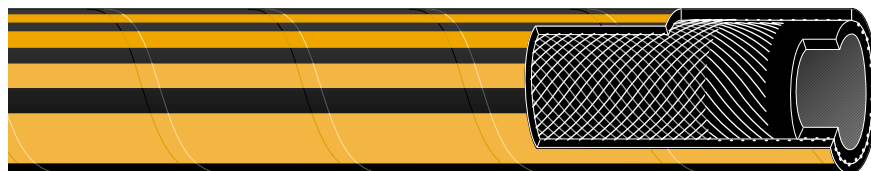

Technical description

Inner tube: EPDM, black, smooth.

Reinforcement: synthetic textile.

Cover: EPDM, black with 4 longitudinal orange stripes, fabric impression.

Temperature range: -30 °C to +100 °C.

Branding: unbranded.

Standard / approval: NF - EN ISO 1403 type 2, except branding.

ID mm	Wall thickness mm	OD mm	Working pressure bar	Bursting pressure bar	Bending radius mm	Weight kg/m	Length m	Article No.	Stock item
30.0	4.25 ± 0.75	39.0 ± 1.00	10	31.5	240	0.72	20	200259	●
							40	200260	●
32.0	4.25 ± 0.75	41.0 ± 1.00	10	31.5	260	0.77	20	123234	1
							40	123239	1
35.0	4.25 ± 0.75	44.0 ± 1.00	10	31.5	280	0.83	20	200261	●
							40	200262	●
38.0	4.25 ± 0.75	47.0 ± 1.00	10	31.5	310	0.90	20	123245	1
							40	70387	1
40.0	4.25 ± 0.75	49.0 ± 1.00	10	31.5	320	0.94	20	200263	●
							40	200264	●
45.0	4.25 ± 0.75	54.0 ± 1.00	10	31.5	360	1.05	20	123248	1
							40	123251	1
50.0	4.25 ± 0.75	60.0 ± 1.00	10	31.5	500	1.26	20	200265	●
							40	200266	●
60.0	5.25 ± 1.00	71.0 ± 1.50	10	31.5	600	1.71	20	123253	2
							40	123255	2
63.0	5.25 ± 1.00	74.0 ± 1.50	10	31.5	630	1.79	20	123256	2
							40	123257	2
70.0	5.25 ± 1.00	81.0 ± 1.50	10	31.5	700	1.97	20	123261	2
							40	123263	2
75.0	5.25 ± 1.00	86.0 ± 1.50	10	31.5	750	2.13	20	123267	2
							40	123271	2
80.0	5.75 ± 1.00	92.0 ± 1.50	10	31.5	800	2.46	20	123288	2
							40	123289	2
89.0	5.75 ± 1.00	101.0 ± 1.50	10	31.5	900	2.75	20	123298	2
							40	123306	2
100.0	5.75 ± 1.00	112.0 ± 1.50	10	31.5	1000	3.04	20	123307	2
							40	123308	2

● = Stock item.

1 = Non stock, min. quantity = 400 m.

2 = Non stock, min. quantity = 200 m.