# SUPERVRAC

## Applications

Pneumatic transport of bulk abrasive products.
Discharge from road and rail tankers and delivery to storage bins (cement, sand, limestone, coal, etc.).

## Advantages

- Lightweight, flexible hose that coils flat and can be supplied cut to length as required.
- Excellent resistance to abrasion.
- Static conductive tube.

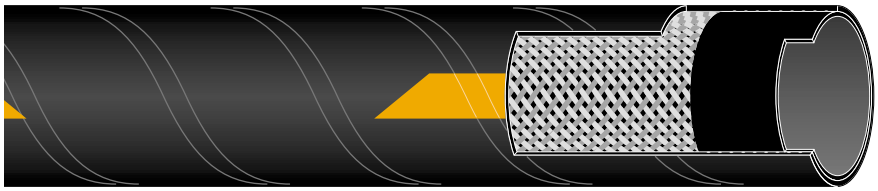

## Technical description

**Inner tube:** wear resistant NR, black, smooth.
**Reinforcement:** synthetic textile.
**Cover:** weather resistant NR, black, fabric impression.
**Temperature range:** –30 °C to +90 °C.
**Electrical properties:** conductive tube R <$10^6 \Omega$/m.
**Branding:** by transfer stripe showing a discontinuous of orange trapeziums with

TRELLEBORG printed in black on each trapezium

and ***SUPERVRAC*** printed in orange between trapeziums

## Couplings / Fittings

Factory fitted assemblies available with full flow couplings in 89 mm and 110 mm.
For other assemblies consult TRELLEBORG.

| ID mm | Wall thickness mm | | OD mm | | Working pressure bar | Bursting pressure bar | Bending radius mm | Weight kg/m | Length m | Article No. | Stock item |
|---|---|---|---|---|---|---|---|---|---|---|---|
| **75.0** | 6.75 | ± 1.25 | 88.5 | ± 2 | 7 | 21 | – | 1.83 | 20 | 60675 | • |
| | | | | | | | | | 40 | 60674 | • |
| **75.0** | 9.00 | ± 1 | 93.0 | ± 1.5 | 7 | 21 | – | 2.75 | 20 | 60189 | • |
| | | | | | | | | | 40 | 60193 | • |
| **85.0** | 6.00 | ± 1 | 97.0 | ± 1.5 | 7 | 21 | – | 2.03 | 20 | 129699 | *1* |
| | | | | | | | | | 40 | 129700 | *1* |
| **89.0** | 6.25 | ± 1.25 | 101.5 | ± 2 | 7 | 21 | – | 2.07 | 20 | 60682 | • |
| | | | | | | | | | 40 | 60683 | • |
| **100.0** | 6.00 | ± 1 | 112.0 | ± 1.5 | 7 | 21 | – | 2.40 | 20 | 129701 | • |
| | | | | | | | | | 40 | 129702 | • |
| **100.0** | 9.00 | ± 1 | 118.0 | ± 1.5 | 7 | 21 | – | 3.58 | 20 | 60194 | • |
| | | | | | | | | | 40 | 60195 | • |
| **110.0** | 6.50 | ± 1.25 | 123.0 | ± 2 | 7 | 21 | – | 2.71 | 20 | 60684 | • |
| **127.0** | 8.50 | ± 1.25 | 144.0 | ± 2 | 7 | 21 | – | 4.20 | 20 | 60685 | *1* |
| | | | | | | | | | 40 | 60686 | *1* |
| **152.0** | 8.50 | ± 1.25 | 169.0 | ± 2 | 7 | 21 | – | 5.00 | 20 | 60689 | *1* |
| | | | | | | | | | 40 | 60690 | *1* |

**• = Stock item.**
**1 = Non stock, mini. quantity = 200 m.**

Bulk tank truck discharge