




## Applications

For drainage pumps and as a discharge hose under pressure in public works.  
Suitable for use as a flexible gutter hose.

## Advantages

- Coils flat for easy storage and use.
- Light.
- Very good resistance to abrasion, cuts, mould, and adverse weather conditions.

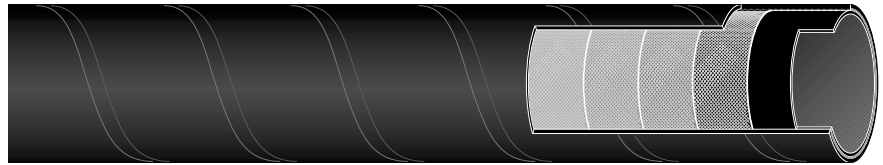

## Technical description

**Inner tube:** SBR, black, smooth.  
**Reinforcement:** synthetic textile.  
**Cover:** SBR, black, fabric impression.  
**Temperature range:** -30 °C to +90 °C.  
**Branding:** unbranded.

ID mm	Wall thickness mm	OD mm	Working pressure bar	Bursting pressure bar	Bending radius mm	Weight kg/m	Length m	Article No.	Stock item
<b>TRELLFLAT, WP = 5 bar</b>									
38.0	1.8	41.6	5	16	–	0.3	40	22244	1
50.0	1.8	53.6	5	16	–	0.4	40	22269	•
63.0	1.8	66.6	5	16	–	0.5	40	22301	•
76.0	1.8	79.6	5	16	–	0.6	40	22327	•
90.0	1.8	93.6	5	16	–	0.7	40	22350	2
100.0	1.8	103.6	5	16	–	0.8	40	22368	•
<b>TRELLFLAT, WP = 3 bar</b>									
127.0	2.7	132.4	3	10	–	1.4	40	22392	2
152.0	2.7	157.4	3	10	–	1.6	40	22400	•
204.0	2.7	209.4	3	10	–	2.1	40	5500000	•
254.0	3.0	260.0	3	10	–	2.7	40	128413	2

• = Stock item.  
 1 = Non stock, min. quantity = 120 m.  
 2 = Non stock, min. quantity = 40 m.