




**Applications**

Suction and discharge of petroleum products with aromatic content up to 50% in all industrial applications. Road tanker equipment for oil and petrol deliveries.

**Advantages**

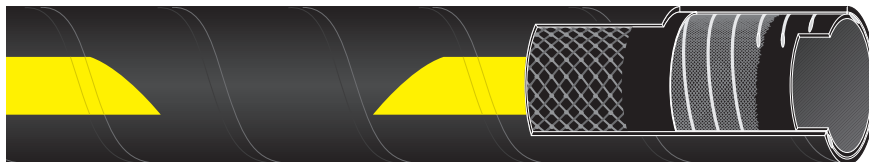

- Easily cut to length and fitted with couplings.
- Light weight and flexible.
- Range of diameters enabling all couplings to be fitted either by crimping or with half shell clamps.
- Dissipation of static electricity ensured by hose tube.




**Technical description**

**Inner tube:** oil and petrol resistant, NBR, black, smooth.  
**Reinforcement:** synthetic textile, braids.  
**Helix:** embedded steel.  
**Cover:** oil and weather resistant NBR/PVC, black, fabric impression.  
**Temperature range:** - 30 °C to + 80 °C .  
**Electrical properties:** conductive tube R <10<sup>6</sup>Ω/lg.

**Branding:**

- by transfer stripe showing a discontinuous of yellow trapeziums with :  
 TRELLEBORG printed in black on each trapezium  
 and  NTH printed in yellow between trapeziums
- in opposite, continuous embossed marking :

 TRELLEBORG    **NTH - EN1761:1999 - SD - ND - WP 10 BAR**  
 Ω - month / year - batch N°

**Standard / approval:** EN 1761 Type SD.

ID mm	Wall thickness mm	OD mm	Working pressure bar	Bursting pressure bar	Max. vacuum bar	Bending radius mm	Weight kg/m	Length m	Article N°	Stock item
<b>19,0</b>	6,00 ± 0,5	31,0 ±1,0	10	40	0,9	125	0,695	20	550151	1
								40	550151	1
<b>25,0</b>	6,00 ± 0,5	37,0 ±1,0	10	40	0,9	150	0,824	20	550150	•
								40	550150	•
<b>32,0</b>	6,00 ± 0,5	44,0 ±1,0	10	40	0,9	175	1,065	20	550150	•
								40	550150	•
<b>38,0</b>	6,50 ± 0,6	51,0 ±1,0	10	40	0,9	225	1,282	20	550150	•
								40	550150	•
<b>50,0</b>	8,00 ± 0,6	66,0 ±1,2	10	40	0,9	275	2,120	20	550150	•
								40	550150	•
<b>63,0</b>	8,00 ± 0,6	79,0 ±1,2	10	40	0,9	300	2,625	20	550150	•
								40	550151	•
<b>75,0</b>	8,00 ± 0,6	91,0 ±1,2	10	40	0,9	350	3,278	20	550151	•
								40	550151	•
<b>100,0</b>	8,00 ± 0,6	116,0 ±1,2	10	40	0,9	450	4,123	20	550151	•
								40	550151	•

• = Stock item.  
 1 = Non stock, mini. quantity = 400 m..